


Locking Assembly series **MAV2005 stainless steel**

Features:

- not self locking
- not self centering
- compact design (low volume)
- screws UNI 5931 - DIN 912

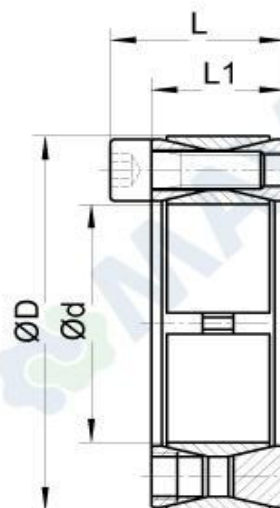

Example of order: MAV2005 – 20 x 47 stainless

Dimensions			Screws		Performance			
d x D mm	L mm	L1 mm	size	Ma Nm	Mt Nm	Fax kN	Ps N/mm ²	Ph N/mm ²
18 x 47	26	20	M6	8,8	150	17,0	82	31
19 x 47	26	20	M6	8,8	160	17,0	78	31
20 x 47	26	20	M6	8,8	160	16,9	74	31
22 x 47	26	20	M6	8,8	180	16,8	67	31
24 x 50	26	20	M6	8,8	220	18,8	69	33
25 x 50	26	20	M6	8,8	230	18,8	67	33
28 x 55	26	20	M6	8,8	290	20,7	66	34
30 x 55	26	20	M6	8,8	310	20,6	62	34
32 x 60	26	20	M6	8,8	390	24,7	69	37
35 x 60	26	20	M6	8,8	420	24,5	63	37
38 x 65	26	20	M6	8,8	540	28,5	68	40
40 x 65	26	20	M6	8,8	560	28,4	65	40
42 x 75	32	24	M8	21,4	940	44,9	83	47
45 x 75	32	24	M8	21,4	1.000	44,7	78	47
48 x 80	32	24	M8	21,4	1.000	44,6	73	44
50 x 80	32	24	M8	21,4	1.100	44,4	70	44
55 x 85	32	24	M8	21,4	1.400	51,6	74	48
60 x 90	32	24	M8	21,4	1.500	51,3	68	45
63 x 95	32	24	M8	21,4	1.800	58,4	74	49
65 x 95	32	24	M8	21,4	1.800	58,3	72	49
70 x 110	38	28	M10	44	2.900	84,3	81	51
75 x 115	38	28	M10	44	3.100	84,0	75	49
80 x 120	38	28	M10	44	3.300	83,6	71	47
85 x 125	38	28	M10	44	4.000	95,2	76	52
90 x 130	38	28	M10	44	4.200	94,9	72	50
95 x 135	38	28	M10	44	5.000	106,0	76	54
100 x 145	45	33	M12	74	5.800	117,0	74	51
110 x 155	45	33	M12	74	6.400	116,0	67	48
120 x 165	45	33	M12	74	7.900	132,0	70	51

Lubricant class H1, FDA approved. Information subject to change without prior notification. © MAV S.p.A.